




AKS 52 FP

The high capacity film processor

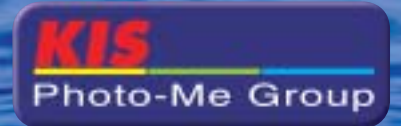

Being able to develop one's growth means developing one's autonomy and productivity. With the automatic film processor AKS 52 FP you benefit from high efficiency, great ease-of-use and maintenance with reliability.

Technical features

Type: Automatic film processor

Film advance: By 2-track film leader

Speed: 628 mm/minute

Processing time: 8'02"

Productivity: 52 films per hour

(24 exposure 135 film or 25 exposure APS film)

Tank capacity:

- Developer: 20,8 l
- Bleach: 5,6 l
- Fixing baths: 5,1 l - 5,5 l
- Stabilisers: 3,2 l - 3,4 l - 3,8 l
- Maintenance: 10 l
- Waste: 2 x 7 l - Recovery of waste chemicals containing silver salts

Chemical: C41-RA

Film types: 135, 126, APS, 110, 120, 220

Dimensions: D: 1345 mm, L: 580 mm, H: 1000 mm

Weight: 270 kg with chemical

Power supply: Single-phase alternating current 200V-240V, 4,9 kW

Strong point:

- Baths temperature auto-regulated
- Automatic replenishment haunts to a system of independent pumps
- Automatic filtration and circulation of all baths with AEC
- Automatic end film cut
- Regulated drying temperature
- Timer with calendar
- Stand-by mode drying temperature when no film is being processed

> Productivity

- 52 films per hour
- Simultaneous development of two similar or different film types (except APS)
- Excellent processing stability ever since a production of 30 films/day

> Simplicity

- Processing of all your films 135, APS, 110, 120, 220 and 126
- Automatismes to ensure the photofinisher's optimum efficiency
- Ease of maintenance thanks to its user-friendly keyboard that enable the photofinisher to enter all the parameters necessary for its smooth functioning

> Safety

- Safety lock to avoid any accidental opening while the machine is operating
- After processing, vertical storage of the films ready to be printed, without any extra handling

